


Sidewinder – Propane Strip Machine



Features:


- Available in 24"(61 cm) and 30"(76 cm) models
- Rugged, all steel construction
- Planetary brush drive eliminates strip shadows and side torque
- Unique floating head design allows brushes to address irregular surfaces
- Brush RPM speed combined with up to 288 lbs. (130 kg) of head pressure delivers fast, deep stripping or scrubbing
- Standard centrifugal clutch substantially increases belt life
- Strips 7-10 layers of finish in just one pass
- Transport wheel for easy loading and maneuvering
- Additional 8 gallon (30.3L) water tank available upon request
- Green Cleaning certifications: EPA, LEED, GS-42

Productivity:

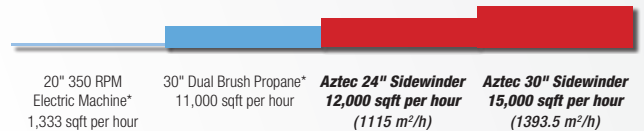

* Source: The Official ISSA Cleaning Times October 2009

Stripping one hour with the Sidewinder eliminates up to 8 hours of labor expense compared to corded electric equipment.



Planetary Rotation Brush Drive

Aggressive:

Unique dual direction scouring action plus heavy brush pressure result in high productivity, with no side torque.

Sidewinder Specifications

Path Size	24" (61 cm)	30" (76 cm)
Engine	Kawasaki 603 cc	
Centrifugal Clutch	standard	
Head Pressure	241 lbs (109 kg)	288 lbs (130 kg)
Brush Size	3 ea. 10" (25 cm) Malgrit	
Brush Speed (Counterclockwise)	1161 RPM	1295 RPM
Brush Drive Speed (Clockwise)	300 RPM	250 RPM
Machine Weight	420 lbs (190 kg)	440 lbs (199 kg)
Height	42.25" (107 cm)	42.25" (107 cm)
Length	43.25" (110 cm)	47.25" (120 cm)
Width	26.5" (67 cm)	32.75" (83 cm)
Shipping Weight*	Approx. 475 lbs (215 kg)	Approx. 495 lbs (225 kg)
Machine Warranty	1 year	
Engine Warranty	2 years/500 hours	
Green Certifications	EPA, LEED, GS-42 Available with Blue Sky Certified Engine	

*Shipping dims 56"x36"x48"; weight may change slightly due to varying skid weight.



800-331-1423 www.aztecproducts.com